



ARCHON model AKG-F-AM Armored Sight Flow Indicator

Section 2003
 Bulletin 1001
 Issued 01/08
 Page 028


ARCHON model AKG-F-AM Armored Sight Flow

The model AKG-F-AM is a Flanged, Armored, full view sight flow indicator providing maximum viewing with maximum security. These units can be mounted in a vertical or horizontal position. The sheathing on the unit protects the glass from outside mechanical forces and accidental knocks from hard or sharp objects. End plate material and body material can be supplied in Stainless Steel or Epoxy coated carbon steel. Units can be supplied in any length required, see dimension section for standards. Flanged units are standard 150# flange drilling.



Wetted Parts:

- Pyrex Glass Tube
- O-ring Seal
- Teflon Insert

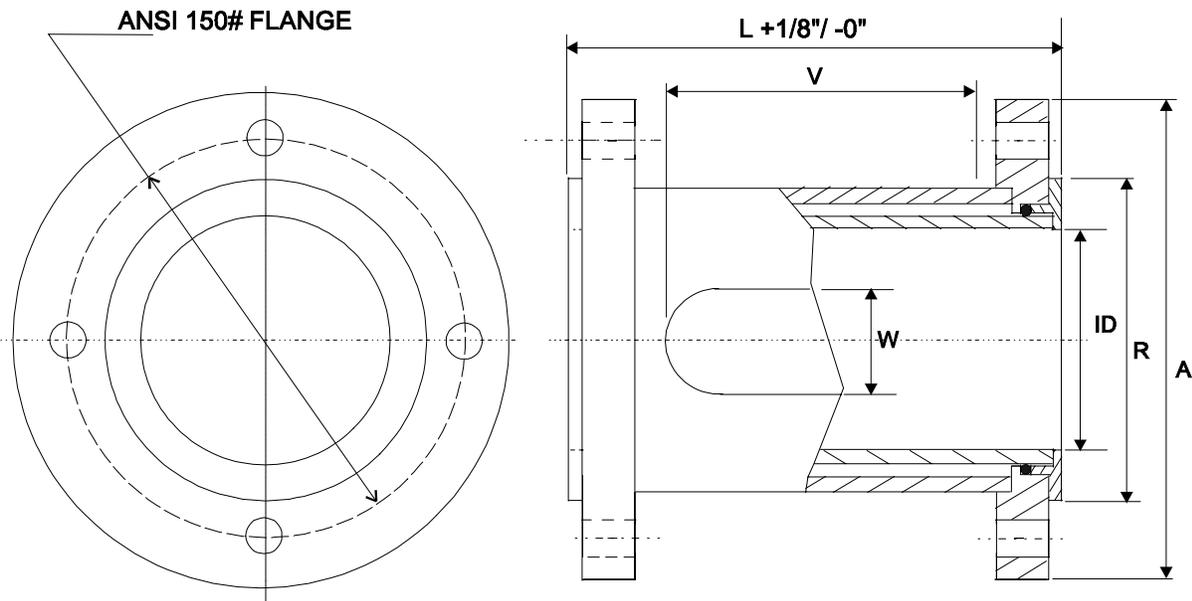

Model No.	ANSI 150# RF Flange Size	Dimensions (in)						Maxm. Pressure (psig)
		L	A	ID	R	V	W	
AKG-F-AM-1	1"	6-3/8	3-1/2	0.5	2	4	1	150
AKG-F-AM-1.5	1-1/2"	6-3/4	7-1/2	2.84	2-7/8	5	1-1/4	150
AKG-F-AM-2	2"	7-5/8	9	3.93	3-5/8	5-3/4	1-1/4	120
AKG-F-AM-2.5	2-1/2"	7-7/8	11	6.12	4-1/8	5-3/4	1-1/2	100
AKG-F-AM-3	3"	8-1/8	16	9.13	5	5-7/8	1-3/4	85
AKG-F-AM-4	4"	8-1/8	19	11.7	5-3/16	5-7/8	1-3/4	90