

standard design


- wetted material: ASTM SA-240 316LSS; non-wetted: 304SS
- with soda lime glass pane
- plastic handles with stainless steel sleeves
- silicone seal (blue)
- with hinge and handle
- neck height 6" (150 mm), neck thickness 4 mm
- surface unground shot blasted, from size 600 unground, pickled

options

- wetted materials: HC-276, HC-22, HC-2000, Alloy 600, AL6XN Alloy, etc..
- intermediate sizes possible
- variety of seal materials (p.12 - 13)
- surface finishes (shot blasted, pickled or ground to 500 grit)
- neck length up to 2000 mm, neck thickness up to 20 mm
- with conical neck (up to 8 mm thickness)
- various handles and screws: stainless steel handle, t-handle, collarnut (p.21)
- cover with swivel feature (p.21)
- locking pin (p.21)
- spring assist (torsion-, disc- or gas-springs) (p.21)
- limit switches
- safety grill and safety cross (p.22)
- non-wetted metal parts in different materials
- with wipers and lights

pressureless glass pane cover

with soda lime glass pane

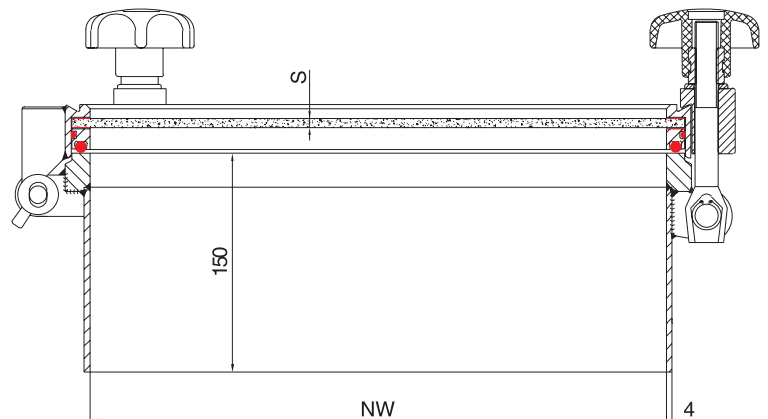

model #	size (NW)	number of screws M16	thickness of glass pane	weight in kg
332 004	200	4	6	13
332 504	250	4	6	15
333 004	300	4	6	17
333 504	350	4	6	19
334 004	400	4	6	21
334 504	450	4	6	23
335 004	500	4	6	27
336 004	600	4	6	31

seals see page 12/13

Archon Industries, Inc. tel: (845) 368-3600
 357 Spook Rock Road fax: (845) 368-3040
 Suffern, NY 10901
 USA info@ARCHONind.com